18”, 12”, 36” Push Assembly Instructions

10601 Theresa Drive Jacksonville, Fl 32246 904-641-3934

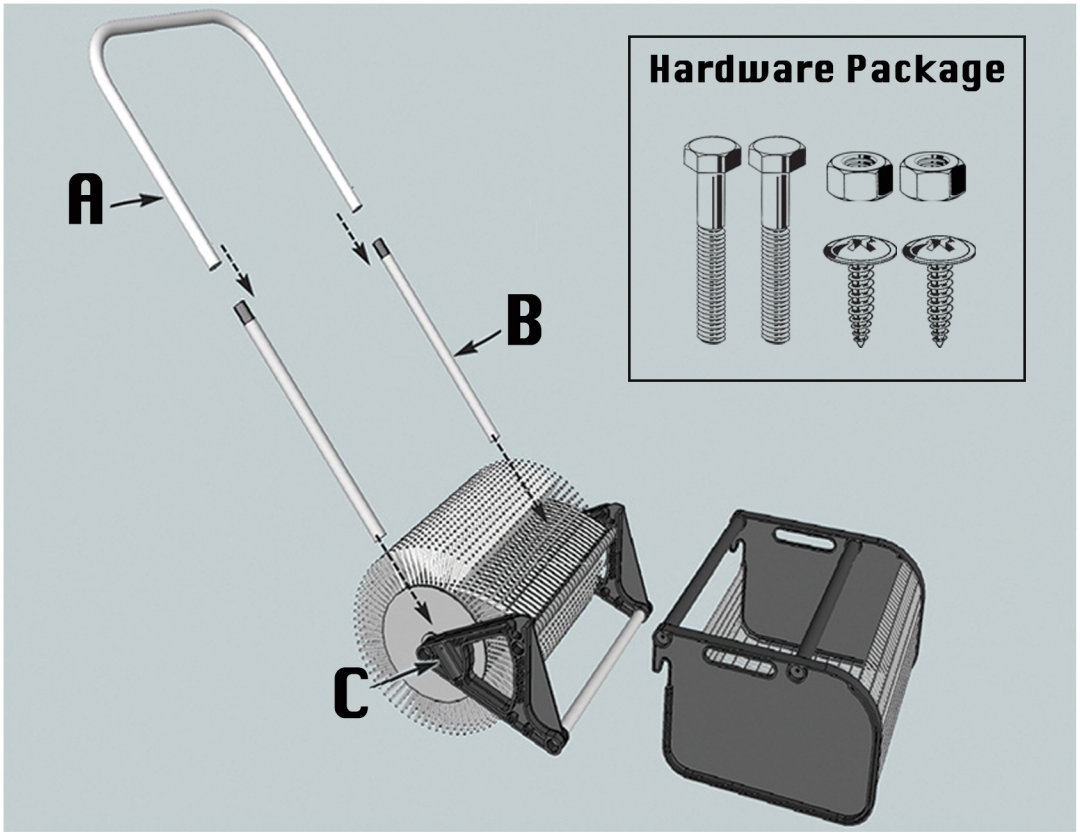

1. Insert legs (A) into the socket of the triangular bracket (B), making sure the base hole (C) is aligned on the outside, for the screw to be placed later. Place handle (D) over the legs (A) with extractor knobs (E) facing up.

2. Push the large HEX bolt through the front of the handle. Tighten with the lock nut (Fig 1).
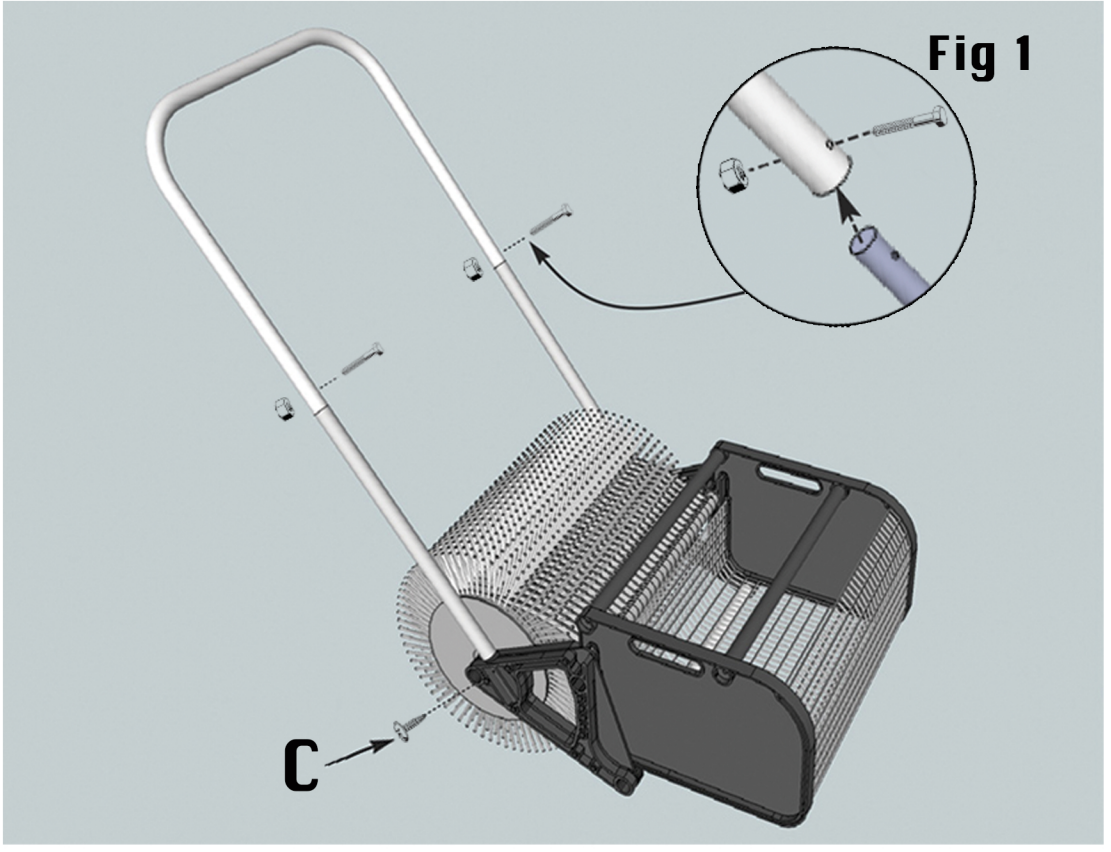
3. Screw the handle into the triangle side bracket (C) with the small screws.